



18 Apr 2016

## Photocell and Flasher Unit for LED Obstruction Lights

CEL-PCFL-DC1-TB - 12, 24, 48VDC Operating Voltage

## **Key features**

- Extremely reliable
- Very low power consumption
- One model for 12, 24, 48VDC operating voltages
- Optimised for LED Obstacle lights
- Suitable for solar applications
- Overvoltage protection Electrical characteristics

## **Electrical characteristics**

- Swiching current max. 8A
- Current consumption <3.5mA@12V
- Current consumption <6mA@48V
- Operating voltage range 12 to 59VDC
- Terminals for 2.5mm2 wires

## Photocell characteristics

- Turn on delay 1s
- Turn off delay 200s
- User selectable photocell sensitivity (bold = factory default) OFF/200 lux / 400 lux / 800 lux

## Flash Controller Characteristics

- User selectable flashing rate (bold = factory default)
  Steady burning / 20 fpm / 40 fpm / 60 fpm
- 250 ms flash duration

## Other

- Overvoltage protection
- Operating temperature range -55..+55 C
- Height 18mm, width 25mm, length 75mm
- 5 year warranty

## Order Codes for DC PCFL products


- -10cd ICAO Type A Light with Photocell: CEL-LI-10-DCW-PCFL
- -32cd ICAO Type B/FAA L-810 Light with photocell: CEL-LI-32-DCW-PCFL Photocell circuit board only: CEL-PCFL-DC1-B Stand alone photocell: CEL-PCFL-DC1-TB

One photocell can drive several light units

Made In EU



CEL-PCFL-DC1-



T: +44 (0)20 8540 1034 F: +44 (0)20 8543 3058 E: info@contarnex.com

Contarnex Europe Limited 252 Martin Way, Morden, Surrey SM4 4AW United Kingdom








# Photocell and Flasher Unit for LED Obstruction Lights

CEL-PCFL-DC1-TB - 12, 24, 48VDC Operating Voltage


### **Fixing Dimensions**

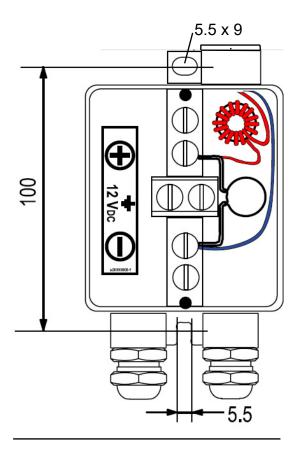

## **Block Diagram**

#### PCFL DIP switches

ON FLASH RATE STEADY BURNING DIP1 DIP2 PHOTOCELL DIP3 DIP4 OFF OFF OFF (light always ON) OFF OFF ON OFF 200 lux 20 fpm ON OFF 3. OFF ON 400 lux OFF ON 40 fpm 4. 800 lux 60 fpm Default DIP settings: 800 lux, steady burning

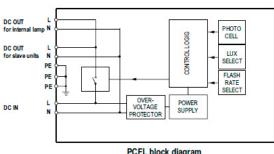

PCFL block diagram



